



SIF-00030-TM(6)


179179




PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6: H03H 21/00, H04B 3/23		A1	(11) International Publication Number: WO 95/12919
			(43) International Publication Date: 11 May 1995 (11.05.95)
(21) International Application Number: PCT/US94/12449		(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, TJ, TT, UA, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ).	
(22) International Filing Date: 27 October 1994 (27.10.94)		Published With international search report.	
(30) Priority Data: 146,644 1 November 1993 (01.11.93) US		 *G00002*	
(71) Applicant: QUALCOMM INCORPORATED [US/US]; 6455 Lusk Boulevard, San Diego, CA 92121 (US).			
(72) Inventors: SIH, Gilbert, C.; Apartment 8, San Diego, CA 922126 (US). ANTONIO, Franklin, P.; 2765 Corboda Cove, Del Mar, CA 92014 (US).			
(74) Agents: OGROD, Gregory, D. et al.; Qualcomm Incorporated, 6455 Lusk Boulevard, San Diego, CA 92121 (US).			

(54) Title: A VARIABLE BLOCK SIZE ADAPTATION ALGORITHM FOR NOISE-ROBUST ACOUSTIC ECHO CANCELLATION

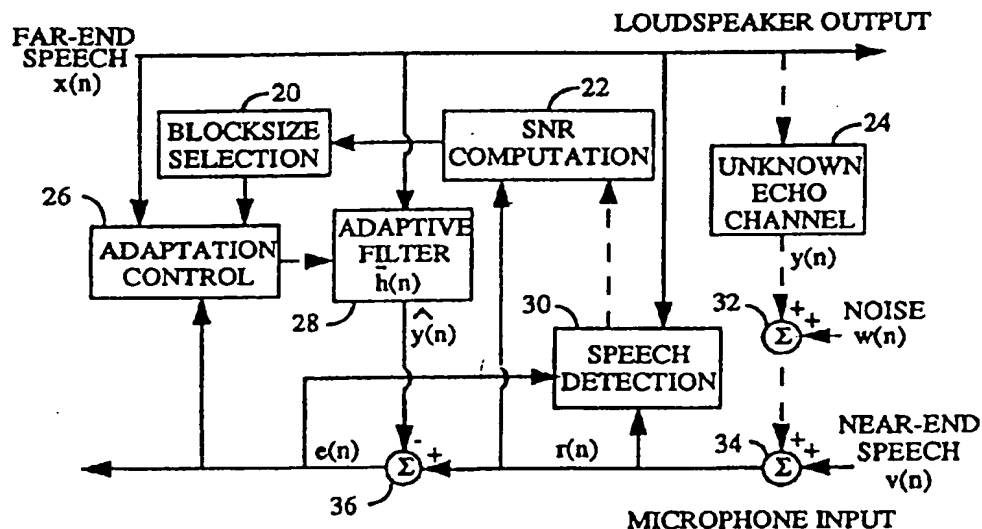

(57) Abstract

An apparatus that automatically adjusts the adaptation block size for a least-mean square (LMS) adaptive filter depending on the input signal-to-noise ratio (SNR) is disclosed. The apparatus monitors the instantaneous SNR (22) and continually adjusts the block size (20, 26) to provide high noise immunity, thereby increasing the convergence speed of the filter and decreasing the asymptotic mean-square error. An exemplary embodiment of the present invention is presented in the context of acoustic echo cancellation, though it is noted that the adaptive filter of the present invention is useful in any environment in which the noise characteristics are subject to change.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TC	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

A VARIABLE BLOCK SIZE ADAPTATION ALGORITHM FOR NOISE -ROBUST ACOUSTIC ECHO CANCELLATION

BACKGROUND OF THE INVENTION

5

I. Field of the Invention

The present invention relates to communication systems. More particularly, the present invention relates to a novel and improved
10 adaptive filter wherein the number of consecutive samples over which an averaging procedure is performed to adjust the tap values of the adaptive filter varies in accordance with the noise content of the channel upon which the adaptive filter operates.

15 II. Description of the Related Art

Acoustic echo cancellers (AEC) are used in teleconferencing and hands-free telephony applications to eliminate acoustic feedback between a loudspeaker and a microphone. In a mobile telephone system where a
20 vehicle occupant uses a hands-free telephone, acoustic echo cancellers are used in the mobile station to provide full-duplex communications.

For reference purposes, the driver is the near-end talker and the person at the other end of the connection is the far-end talker. The speech of the far-end talker is broadcast out of a loudspeaker in the mobile. If this
25 speech is picked up by a microphone, the far-end talker hears an annoying echo of his or her own voice. An acoustic echo canceller identifies the unknown echo channel between the loudspeaker and microphone using an adaptive filter, generates a replica of the echo, and subtracts it from the microphone input to cancel the far-end talker echo.

30 A block diagram of a traditional acoustic echo canceller is shown below in Figure 1, where the echo path has been shown using dashed lines. The far-end speech $x(n)$ is broadcast out as loudspeaker output and passes through the unknown echo channel 6, which is illustrated as an element though its existence is simply an artifact of the near-end microphone's
35 colocation with the near-end loudspeaker, to produce the echo signal $y(n)$. The near-end microphone input receives the sum of the echo signal $y(n)$, channel noise $w(n)$ and near-end speech $v(n)$, the summations of which are shown by means of summing elements 8 and 10, which are purely for

illustrative purposes. The near-end received signal $r(n)$ is a sum of the echo signal $y(n)$, channel noise $w(n)$ and near-end speech $v(n)$.

When the far-end talker is the only one speaking, the filter coefficients represented by vector $\bar{h}(n)$ are adapted to track the impulse response of the unknown echo channel. Adaptation control element 2 receives the error or residual signal $e(n)$ and the far-end speech $x(n)$ and in response provides a tap correction signal to adaptive filter 4. The adaptive filter 4 receives the tap correction signal and corrects its filter tap values in accordance with the tap correction signal. In accordance with the adapted filter coefficients $\bar{h}(n)$ and the far-end speech signal $x(n)$, adaptive filter 4 generates a replica of the echo, $\hat{y}(n)$ which is provided to subtraction element 12. Subtraction element 12 subtracts the estimated echo $\hat{y}(n)$ from near-end received signal $r(n)$.

Typically, the algorithm used to update the filter tap coefficients that track the echo path response is the least-mean-square (LMS) adaptation algorithm. The filter order is denoted as N and the far-end speech vector $\bar{x}(n)$ is represented as:

$$\bar{x}(n) = [x(n) \ x(n-1) \ x(n-2) \ \dots \ x(n-N+1)], \quad (1)$$

and the filter-tap coefficient vector is represented as:

$$\bar{h}(n) = [h_0(n) \ h_1(n) \ h_2(n) \ \dots \ h_{N-1}(n)]. \quad (2)$$

As each new sample $r(n)$ is received, the algorithm computes the echo estimate $\hat{y}(n)$ based on its current filter taps:

$$\hat{y}(n) = \langle \bar{h}(n) \ \bar{x}(n) \rangle = \sum_{i=0}^{N-1} h_i(n)x(n-i). \quad (3)$$

This estimated echo signal $\hat{y}(n)$ is subtracted from the near-end received signal $r(n)$, so that the echo residual is given by:

$$e(n) = r(n) - \hat{y}(n). \quad (4)$$

The adaptation algorithm is disabled when the near-end talker is speaking, so that the tap coefficient vector is then updated as:

$$\bar{h}(n+1) = \bar{h}(n) + \alpha e(n) \bar{x}(n) \quad (5)$$

5

where α is the adaptation step size and the error signal in the absence of near-end speech $v(n)$ and noise $w(n)$ is given by:

$$e(n) = y(n) - \hat{y}(n) \quad (6)$$

10

The LMS algorithm derives its name from the fact that it attempts to minimize the mean of the squared error:

$$MSE(n) = E[e^2(n)]. \quad (7)$$

- 15 The LMS algorithm is also called the "stochastic gradient" method because an approximation to the gradient of $MSE(n)$ with respect to the tap vector is given by:

$$\frac{\partial MSE(n)}{\partial \bar{h}(n)} = -2e(n)\bar{x}(n). \quad (8)$$

20

Since the gradient indicates the direction that the mean square error increases most rapidly, each tap update is steered in the opposite direction of the gradient by adapting the tap values in relation to the inverted gradient.

- 25 The main advantages of the LMS algorithm are that it requires less computation than other adaptive methods and its stability can be guaranteed by proper choice of step size. This algorithm executes on a sample-by-sample basis; that is, the tap vector $\bar{h}(n)$ is updated with each new sample.

- 30 An alternative implementation, called the block LMS algorithm, updates the tap vector using a block of L samples. As before, as each new sample $r(n)$ is received, the algorithm computes the echo estimate $\hat{y}(n)$ and the echo residual signal $e(n)$. However, instead of immediately updating the filter coefficients, the algorithm averages L consecutive instances of the negative gradient $e(n)\bar{x}(n)$ (the "2" in the gradient expression has been absorbed into the step size α) and updates the coefficient vector $\bar{h}(n)$ once
35 per L -sample block. The block LMS algorithm can therefore be expressed as:

$$\bar{h}((n+1)L) = \bar{h}(nL) + \frac{\alpha}{L} \sum_{j=0}^{L-1} e(nL+j) \bar{x}(nL+j). \quad (9)$$

Notice that if $L=1$, this equation reduces to the sample LMS presented in equation 5, so the sample LMS algorithm can be considered to be a degenerate case of the block LMS algorithm. The advantage of choosing a block size L greater than 1 is realized when noise is present. As shown in Figure 1, any noise $w(n)$ present in the echo channel is added to the echo signal $y(n)$ and therefore appears in the error signal:

$$e(n) = y(n) + w(n) - \hat{y}(n). \quad (10)$$

Therefore, the direction of each sample gradient is perturbed by the noise, which causes the sample ($L=1$) LMS algorithm to have a longer convergence time and a larger asymptotic mean square error. However, by choosing $L > 1$, we average L consecutive instances of the gradient to achieve a more accurate estimate because the positive and negative noise samples will tend to cancel each other out during the averaging process.

SUMMARY OF THE INVENTION

The present invention is a novel and improved adaptive filter that is more robust to environments that have varying noise energies. An exemplary implementation of the present invention is presented in an exemplary embodiment of an acoustic echo canceller.

When the noise $w(n)$ is small compared to the size of the echo, the sample LMS ($L=1$) converges more rapidly than the block LMS ($L>1$) algorithm for the same step size α . As the noise increases in amplitude, the optimum block size L , for maximum convergence speed, also increases.

In the present invention, a method and apparatus are presented that adjust the block size L responsive to the noise content on the channel. In a preferred embodiment the block size L is adjusted in response to the instantaneous signal-to-noise ratio (SNR). In the exemplary implementation of the present invention, an echo canceller is disclosed that comprises an adaptive filter the taps of which are adapted in accordance with the variable block size LMS method of the present invention.

In the exemplary embodiment of an echo canceller, an adaptive filter generates an estimated echo signal $\hat{y}(n)$, which is subtracted from the near-

end received signal $r(n)$ to provide a residual signal $e(n)$. The noise composition of the channel is monitored, and in accordance with the noise composition of the channel an adaptation block size L is selected. The adaptive filter tap values are then corrected or adapted in accordance with the far-end speech $x(n)$, the residual signal $e(n)$ and the adaptation block size L as shown in equation 9.

Although the exemplary implementation of the present invention takes the form of acoustic echo cancellation, it is envisioned that the scope of the present invention extends to use in any environment in which adaptive filters are employed and the channel noise characteristics are subject to change.

BRIEF DESCRIPTION OF THE DRAWINGS

The features, objects, and advantages of the present invention will become more apparent from the detailed description set forth below when taken in conjunction with the drawings in which like reference characters identify correspondingly throughout and wherein:

Figure 1 is a block diagram of an echo canceller employing a traditional fixed block size LMS algorithm; and

Figure 2 is a block diagram of an exemplary implementation of the present invention of a variable block size LMS algorithm within an acoustic echo canceller.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

In the present invention, a method and apparatus are presented that adjust the block size L responsive to the noise content on the channel. In a preferred embodiment the block size L is adjusted in response to the instantaneous signal-to-noise ratio (SNR). Ideally, the signal being referred to in the instantaneous SNR is the echo signal, such that the signal-to-noise ratio at time n , $SNR(n)$, is computed as:

$$SNR(n) \text{ (dB)} = 10 \log_{10} [E_y(n) / E_w(n)], \quad (11)$$

where $E_y(n)$ is the energy of the echo signal at time n and $E_w(n)$ is the energy of the noise signal at time n .

However, since the actual value of $y(n)$ is unknown at the filter, the echo signal energy $E_y(n)$ can be approximated as:

$$\hat{E}_y(n) = \sum_{i=0}^N [r(n-i)]^2 \quad (12)$$

5

during periods where the far-end talker is the only one talking. Similarly, since the noise signal $w(n)$ is unknown at the filter the noise energy $E_w(n)$ can be computed as:

$$\hat{E}_w(n) = \sum_{i=0}^N [r(n-i)]^2 \quad (13)$$

10

when both the far-end and near-end talkers are silent. Using the approximations in equations 10 and 11, an approximation of the signal to noise SNR(n) ratio of equation 11 can be computed as:

15

$$S\hat{N}R(n) = 10\log_{10}[\hat{E}_y(n)/\hat{E}_w(n)] \quad (14)$$

Referring now to Figure 2, speech detection element 30 monitors the energy of signals $x(n)$, $r(n)$, and $e(n)$ to determine when the far-end talker is the only one talking and when neither talker is speaking. Speech detection element 30 provides control signals to the SNR computation element 22. SNR computation element 22 also receives the near-end received signal $r(n)$ and computes $\hat{E}_y(n)$, $\hat{E}_w(n)$, and $S\hat{N}R(n)$ as given above, responsive to the control signals from speech detection element 30. SNR computation element 22 provides $S\hat{N}R(n)$ to block size selection element 20, which selects the adaptation block size L in accordance with $S\hat{N}R(n)$. Block size selection element 20 provides the adaptation block size L to adaptation control element 26.

Adaptation control element 26 receives far-end speech $x(n)$ and error signal $e(n)$, in addition to the adaptation block size L and in accordance with these input signals determines filter tap correction values $\bar{c}(nL)$ as follows:

$$\bar{c}(nL) = \frac{\alpha}{L} \sum_{j=0}^{L-1} e(nL+j) \bar{x}(nL+j). \quad (15)$$

The filter tap correction values $\bar{c}(nL)$ are provided to adaptive filter 28 by adaptation control 26. In response to the filter tap correction values $\bar{c}(nL)$, adaptive filter 28 generates corrected filter tap values $\bar{h}((n+1)L)$ as:

$$\bar{h}((n+1)L) = \bar{h}(nL) + \bar{c}(nL). \quad (16)$$

Adaptive filter 28, also, receives far-end speech signal $x(n)$, and generates an estimate of the echo signal $\hat{y}(n)$ in accordance with the corrected filter tap values $\bar{h}((n+1)L)$ and the far-end speech signal $x(n)$. The estimated echo signal $\hat{y}(n)$ is then subtracted from the near-end received signal $r(n)$ by subtraction element 36.

In the exemplary embodiment the present invention has been described in the context of an acoustic echo canceller. This is a particularly useful application of the present invention since the noise in a car continually changes owing to many factors, such as vehicle speed, smoothness of the road, weather conditions, varying external noise, and whether the car windows are up or down. For example, the driver may initiate a call while sitting in a quiet parked car where the apparatus of the present invention would set L equal to 1 for fastest convergence. When the driver starts the car and revs the engine, the machine would detect the drop in SNR and automatically increase L , to say 32. While driving through a quiet residential area, the apparatus of the present invention may decrease L to 16, and upon entering a bumpy freeway, the apparatus of the present invention may again increase L to 64. This automatic block size selection for fastest convergence is important, because the adaptive filter must be continually updated to account for changes in the acoustic channel between the loudspeaker and the microphone.

An alternative embodiment of the present invention comprises a plurality of adaptive filters each of which employs a different averaging length for adapting the filter coefficients. An output source is then dynamically selected from the outputs of the bank of adaptive filters. In yet another alternative embodiment, instead of varying the block sizes directly, temporally staggered blocks of one size may be used.

Although in the exemplary embodiment of the present invention is presented in the environment of an acoustic echo canceller, it is applicable in any environment in which adaptive filters are employed and the channel noise characteristics are subject to change, such as network echo cancellation and channel equalization.

The previous description of the preferred embodiments is provided to enable any person skilled in the art to make or use the present invention. The various modifications to these embodiments will be readily apparent to those skilled in the art, and the generic principles defined herein may be applied to other embodiments without the use of the inventive faculty. Thus, the present invention is not intended to be limited to the embodiments shown herein but is to be accorded the widest scope consistent with the principles and novel features disclosed herein.

10 WE CLAIM:

CLAIMS

1. An adaptive filter comprising:
2 block size selection means for determining and providing a variable
adaptation block size value;
4 filter coefficient computation means for receiving said variable
adaptation block size value and for determining and providing at least one
6 filter coefficient value responsive to said variable adaptation block size
value; and
8 filter means for receiving said at least one filter coefficient value and
for filtering a signal in accordance with said at least one filter coefficient
10 value.

2. The apparatus of Claim 1 further comprising noise
2 computation means for monitoring noise content of a communications
channel and for providing a signal indicative of the noise content of said
4 communications channel; and
wherein said block size selection means is responsive to said signal
6 indicative of the noise content of said communications channel.

3. An echo canceller for canceling an echo signal of a far-end
2 speech signal, comprising:
block size selection means for determining and providing a variable
4 adaptation block size value;
filter coefficient computation means for receiving said variable
6 adaptation block size value and for determining and providing at least one
filter coefficient value responsive to said variable adaptation block size
8 value;
filter means for receiving said at least one filter coefficient value and
10 said far-end speech signal and for providing an estimate of said echo signal
in accordance with said far-end speech signal and said at least one filter
12 coefficient value; and
difference means for subtracting said echo signal estimate from a
14 near-end received signal to provide a residual signal.

4. The apparatus of Claim 3 further comprising noise
2 computation means for monitoring noise content of a communications
channel and for providing a signal indicative of the noise content of said
4 communications channel; and

wherein said block size selection means is responsive to said signal
6 indicative of the noise content of said communications channel.

5. The apparatus of Claim 4 further comprising speech detection
2 means for detecting said far-end speech signal and a near-end speech signal
and for providing a control signal responsive to the presence of said far-end
4 speech signal and said near-end speech signal; and
wherein said noise computation means is responsive to said control
6 signal.

6. A method for adaptively filtering a signal comprising the steps
2 of:
determining a variable adaptation block size value;
4 determining and providing at least one filter coefficient value
responsive to said variable adaptation block size value; and
6 filtering a signal in accordance with said at least one filter coefficient
value.

7. The method of Claim 6 further comprising the steps of
2 monitoring noise content of a communications channel and providing a
signal indicative of the noise content of said communications channel; and
4 wherein said step of determining a variable adaptation block size
value is responsive to said signal indicative of the noise content of said
6 communications channel.

8. A method for canceling an echo signal of a far-end speech
2 signal, comprising:
determining and providing a variable adaptation block size value;
4 determining and providing at least one filter coefficient value
responsive to said variable adaptation block size value;
6 providing an estimate of said echo signal in accordance with said far-
end speech signal and said at least one filter coefficient value; and
8 subtracting said echo signal estimate from a near-end received signal
to provide an echo canceled near-end signal.

9. The method of Claim 8 further comprising the steps of
2 monitoring noise content of a communications channel and for providing a
signal indicative of the noise content of said communications channel; and

4 wherein said step of determining and providing a variable adaptation
block size value is responsive to said signal indicative of the noise content
6 of said communications channel.

10. The method of Claim 9 further comprises the step of providing
2 a control signal responsive to the presence of said far-end speech signal and
a near-end speech signal; and
4 wherein said step of providing a signal indicative of the noise content
of said communications channel is responsive to said control signal.

1/1

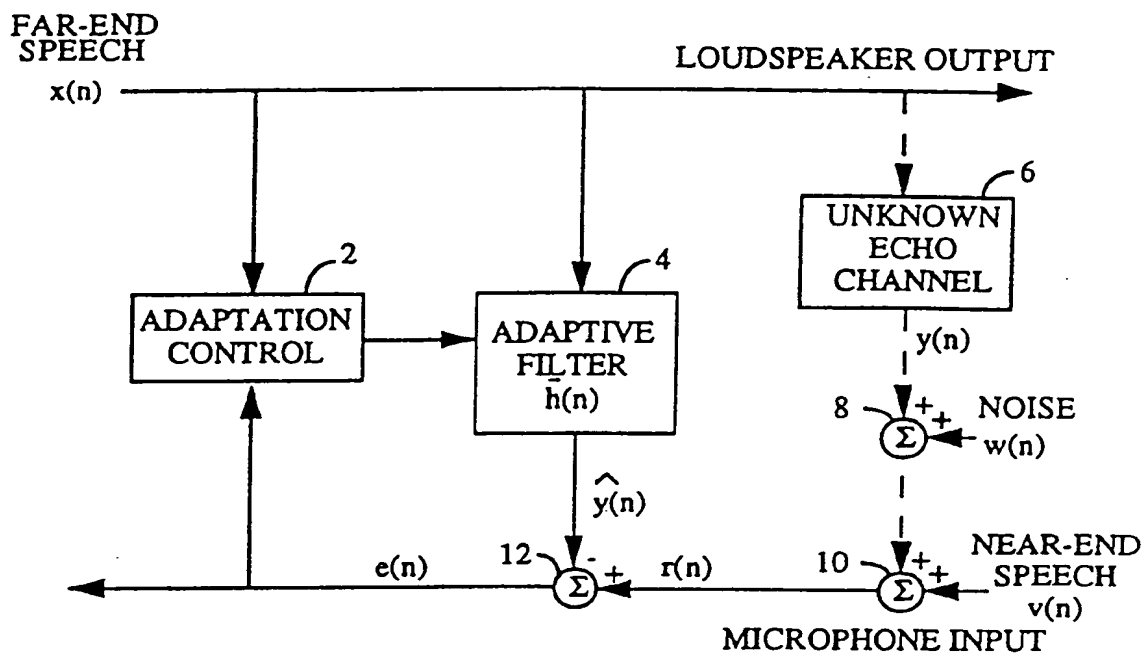


FIG. 1

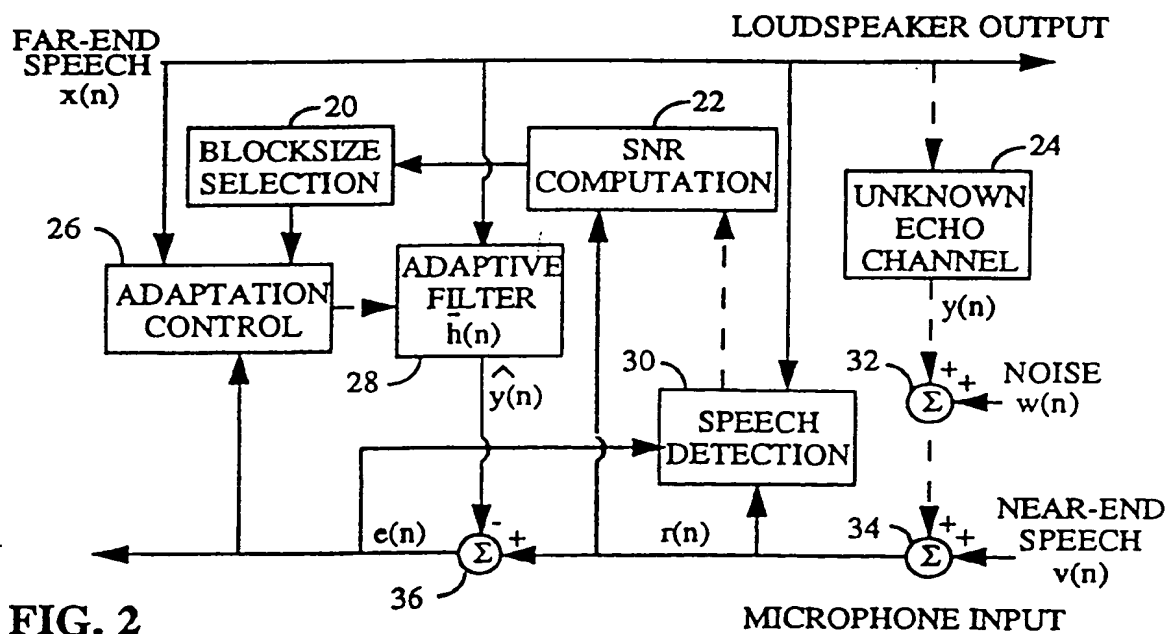


FIG. 2

INTERNATIONAL SEARCH REPORT

Intern. Application No
PCT/US 94/12449

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H03H21/00 H04B3/23

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 H03H H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	IEEE TRANSACTIONS ON ACOUSTICS, SPEECH AND SIGNAL PROCESSING, vol.34, no.1, February 1986, NEW YORK US pages 77 - 90	1,6
A	J.M. CIOFFI 'THE BLOCK-PROCESSING FTF ADAPTIVE ALGORITHM' see page 77, column 1, line 1 - page 78, column 2, line 35	2-4,7-9
A	US,A,5 084 866 (K.B. BUTTLE) 28 January 1992 see the whole document	1,3,4,7, 9,10

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

8 February 1995

Date of mailing of the international search report

17.02.95

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Coppieters, C

INTERNATIONAL SEARCH REPORT

Information on patent family members

Intern. Appl. No.

PCT/US 94/12449

Patent document
cited in search report

Publication
date

Patent family
member(s)

Publication
date

US-A-5084866

28-01-92

NONE